



LOW WATT ELECTRIC WATERHEATER





Compact shell
 Firm ABS Housing
 Heating Indicator
 Frontal Temp Control
 Two Mounting Types-Under Sink&Upper Sink



Specifications:

Rated Voltage: AC220~240V
 Rated Frequency: 50Hz
 Rated Power: 200W-500W
 Adjustable Water Temperature: Ambient to 75°C
 Rated Pressure: 0.8MPa
 Water Proof Degree: IPX4



Technical Data

Model No.	Capacity (L)	Product Size (mm)	Packing Dimension (mm)	N.W (kg)	G.W (kg)	Loading Quantity(Unit)		
						20'GP	40'GP	40'HQ
KL-15E	15	355*355*320	390*390*395	10	10.5	449	933	1115
KL-30E	30	355*355*320	390*390*395	10	10.5	449	933	1115



Enameled Inner Tank
Hidden Temp Control
Heating Indicator



Specifications:

Rated Voltage: AC220~240V
 Rated Frequency: 50Hz/60Hz
 Rated Power: 500W–1000W
 Adjustable Water Temperature: Ambient to 75°C
 Rated Pressure: 0.8MPa
 Water Proof Degree: IPX4




Technical Data

Model No.	Capacity (L)	Product Size (mm)	Packing Dimension (mm)	N.W (kg)	G.W (kg)	Loading Quantity(Unit)		
						20'GP	40'GP	40'HQ
KL-50E	50	655*Φ390	445*435*685	15	17.5	203	420	497
KL-80E	80	785*Φ440	495*495*820	22	24.2	128	265	328
KL-100E	100	935*Φ440	495*495*970	25.5	28	107	221	261



Enameled Inner Tank
 Frontal Temp Control
 Heating Indicator

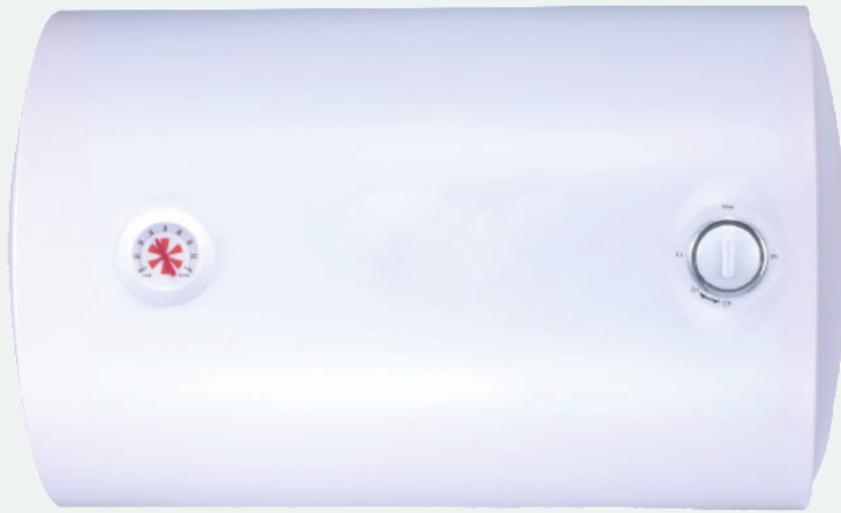

Specifications:

Rated Voltage: AC220~240V
 Rated Frequency: 50Hz/60Hz
 Rated Power: 500W–1000W
 Adjustable Water Temperature: Ambient to 75°C
 Rated Pressure: 0.8MPa
 Water Proof Degree: IPX4



Technical Data

Model No.	Capacity (L)	Product Size (mm)	Packing Dimension (mm)	N.W (kg)	G.W (kg)	Loading Quantity(Unit)		
						20'GP	40'GP	40'HQ
KL-50E	50	655*Φ390	445*435*685	15	17.5	203	420	497
KL-80E	80	785*Φ440	495*495*820	22	24.2	128	265	328
KL-100E	100	935*Φ440	495*495*970	25.5	28	107	221	261



Enamelled Inner Tank
 Floor-standing
 Front Temp Control
 Heating Indicator
 Triple power Fixed Temp Class



Specifications:

Rated Voltage: AC220~240V
 Rated Frequency: 50Hz/60Hz
 Rated Power: 1000W
 Adjustable Water Temperature: Ambient to 75°C
 Rated Pressure: 0.8MPa
 Water Proof Degree: IPX4



Technical Data

Model No.	Capacity (L)	Product Size (mm)	Packing Dimension (mm)	N.W (kg)	G.W (kg)	Loading Quantity(Unit)		
						20'GP	40'GP	40'HQ
KL-150E	150	1235*540*500	1375*620*580	65	70	54	111	133